





Configuration proposal General Surgery (CH2)


Side view right




Front view

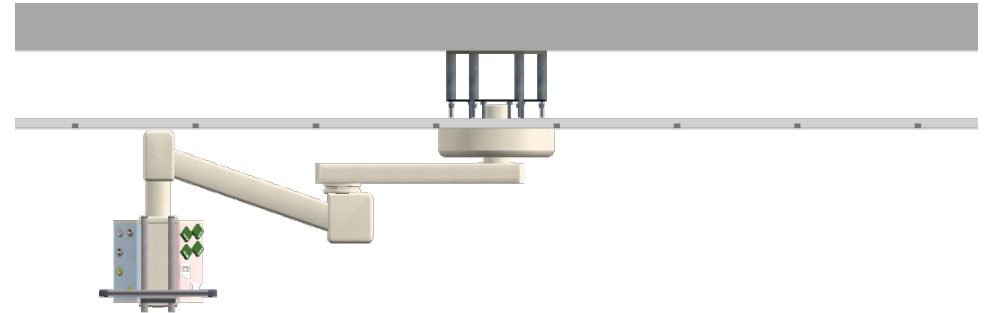

Side view left



Back



Configuration description:

Multimovement pendant 800/1000 with Service Head 400

1 x Shelf 520 mm

1. Brake system: Pneumatic
2. Action space*: >4,400 mm
3. Weights and Pay Loads
 Remaining Net Pay Load: 56 kg
 Max. pendant pay load: 90 kg
 Vertical force as configured: 2322 N
4. Remaining Diameter: 27 %

* reference: centre of main bearing to centre of shelf

Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	2		2				1	8	6	1	2
Greggersen Forano DIN Standard								PEHA			




Configuration proposal General Surgery (CH2)


Side view right



Front view

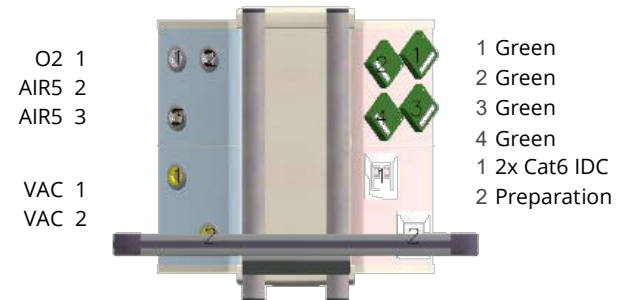

Side view left

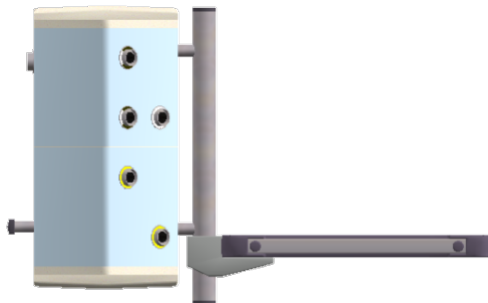

Back

