



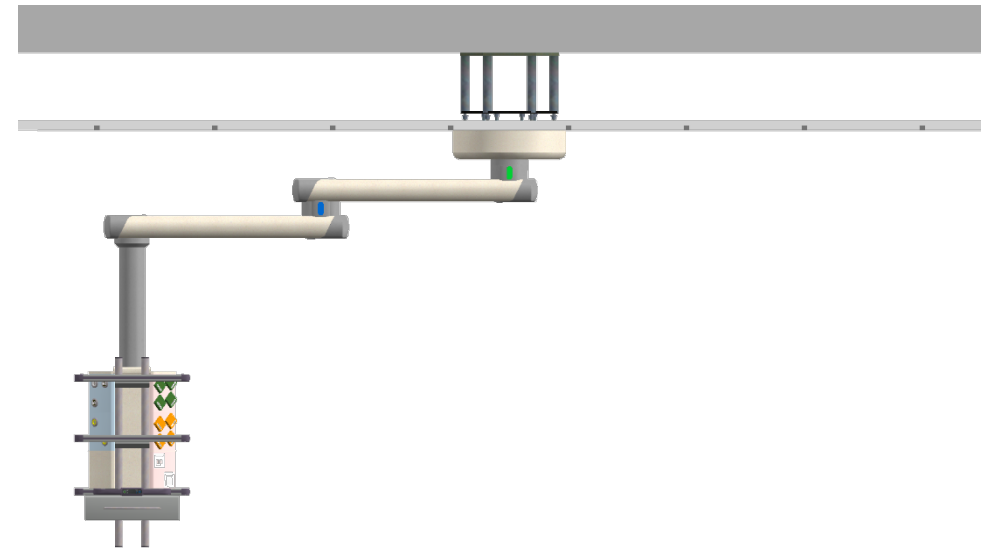

Configuration proposal General Surgery (CH3)

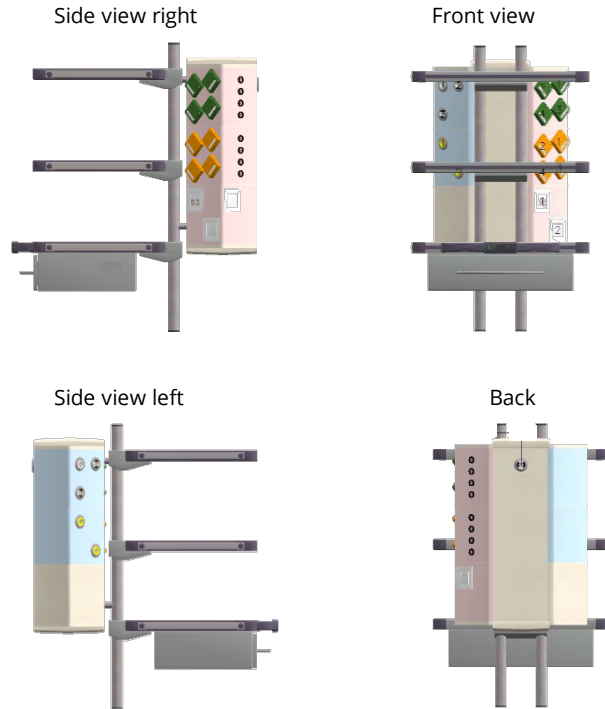

Configuration description:
 MediBoom® 1000/1000 with Service Head 600
 3 x Shelf 520 mm, 1 x Drawer

1. Brake system: Electromagnetic
2. Action space*: >4,800 mm
3. Weights and Pay Loads
 Remaining Net Pay Load: 106 kg
 Max. pendant pay load: 170 kg
 Vertical force as configured: 2986 N
4. Remaining Diameter: 65 %


Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- moto	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	2		2				1	8	8	1	2
Greggersen Forano DIN Standard								PEHA			

* reference: centre of main bearing to centre of shelf




Configuration proposal General Surgery (CH3)

Side view right

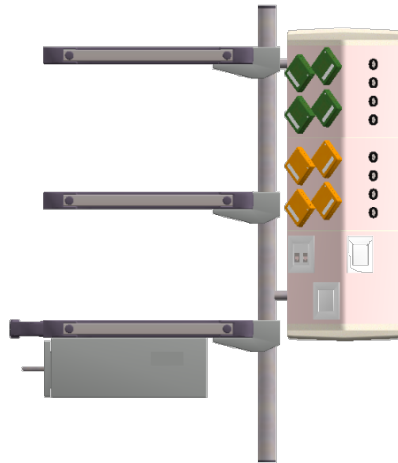


Front view

O2 1
AIR5 2
AIR5 3
VAC 1
VAC 2

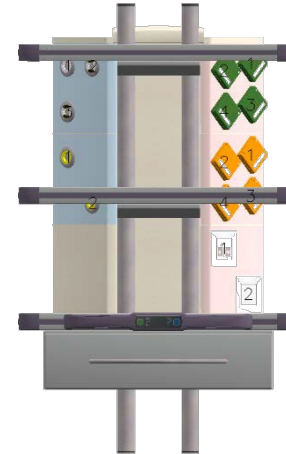


1 Green
2 Green
3 Green
4 Green
1 Orange
2 Orange
3 Orange
4 Orange
1 2x Cat6 IDC
2 Preparation

Side view left

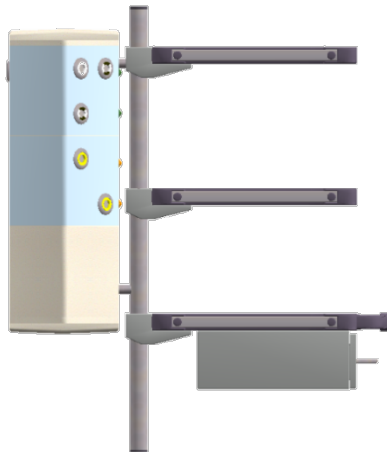

Back

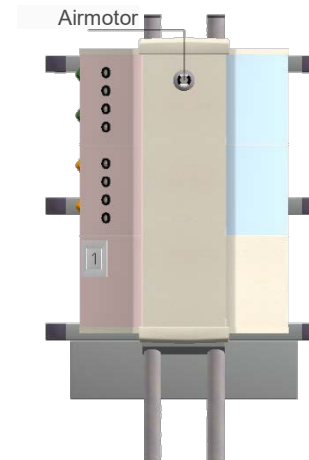

Preparation 1