




Configuration proposal Anesthesia (AN3)


Side view right





Front view



Side view left



Back

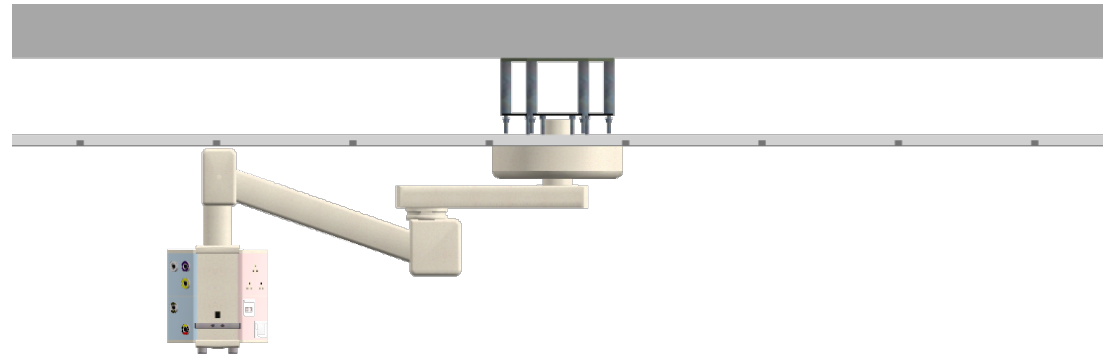

Configuration description:

Multimovement pendant 600/1000 with Service Head 400

1. Brake system: Pneumatic
2. Action space*: >4,000 mm
3. Weights and Pay Loads
 Remaining Net Pay Load: 68 kg
 Max. pendant pay load: 90 kg
 Vertical force as configured: 2278 N
4. Remaining Diameter: 20 %


* reference: centre of main bearing to centre of shelf

Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	1	1	1			1		6	6	1	2
Phoenix P3 British Standard (ISO)								Wands- worth			




Configuration proposal Anesthesia (AN3)

Side view right



Front view


- O2 1
- N2O 2
- AIR4 3
- VAC 1
- AGSS 2



- 1 White
- 2 White

- 1 Preparation
- 2 2x Cat6 IDC

Side view left

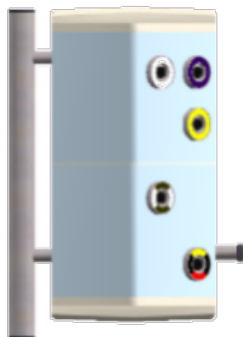

Back

- Red 1
- Red 2

