





Configuration proposal General Surgery (CH2)


Side view right




Front view

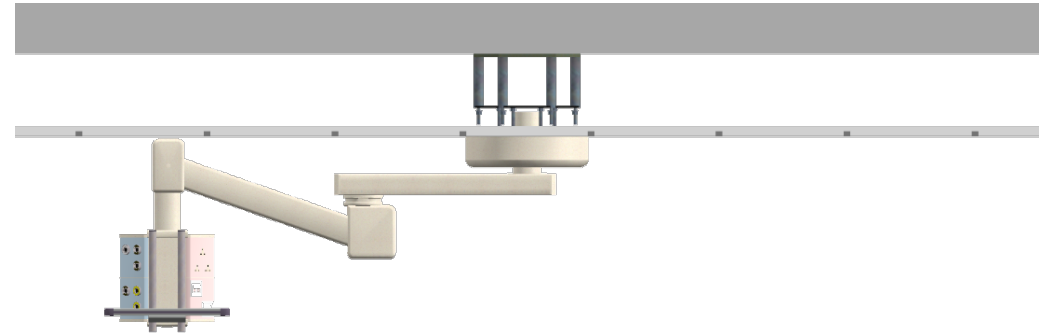

Side view left



Back



Configuration description:

Multimovement pendant 800/1000 with Service Head 400

1 x Shelf 520 mm

1. Brake system: Pneumatic
2. Action space*: >4,400 mm
3. Weights and Pay Loads
 Remaining Net Pay Load: 59 kg
 Max. pendant pay load: 90 kg
 Vertical force as configured: 2322 N
4. Remaining Diameter: 10 %

* reference: centre of main bearing to centre of shelf

Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	2		2				1	6	6	1	1
Phoenix P3 British Standard (ISO)								Wands- worth			



Configuration proposal General Surgery (CH2)


Side view right



Front view

O2 1
AIR4 2
AIR4 3


AIR8 1
VAC 2
VAC 3

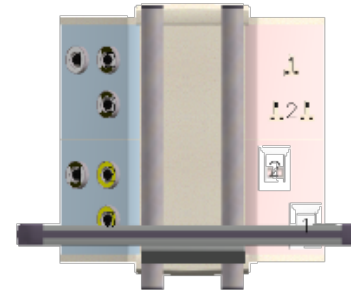

1 White
2 White

1 Preparation
2 2x Cat6 IDC

Side view left

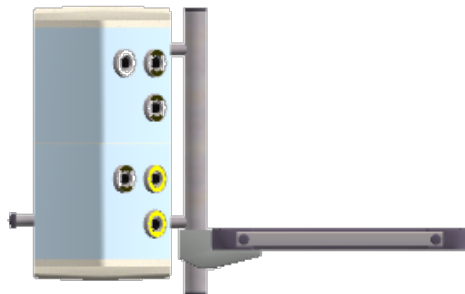

Back

Red 1
Red 2

