



Configuration proposal General Surgery (CH4)


Side view right




Front view



Side view left



Back

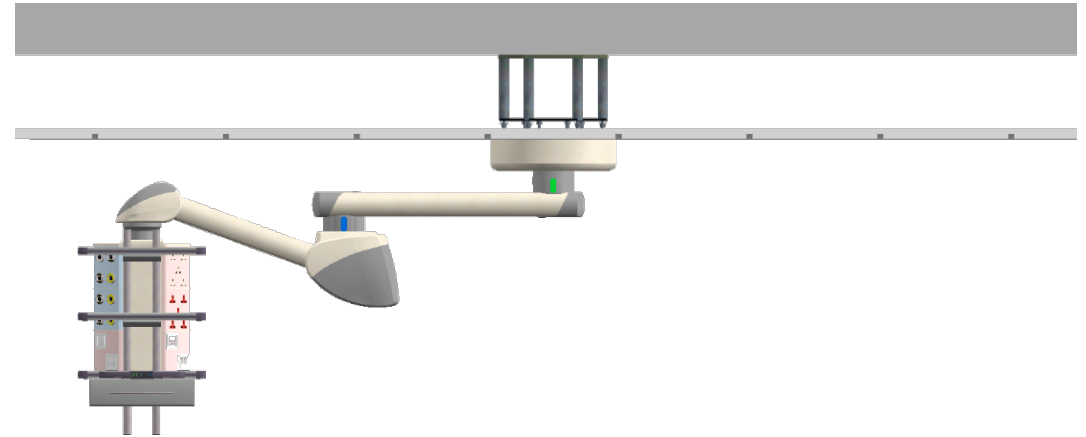

Configuration description:

MediLift 1000/1000 with Service Head 600

3 x Shelf 520 mm, 1 x Drawer

1. Brake system: Electromagnetic
2. Action space*: >4,800 mm
3. Weights and Pay Loads
 Remaining Net Pay Load: 94 kg
 Max. pendant pay load: 150 kg
 Vertical force as configured: 3166 N
4. Remaining Diameter: 41 %


Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air-motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	3		3				1	10	6	2	3
Phoenix P3 British Standard (ISO)								Wands-worth			

* reference: centre of main bearing to centre of shelf



Configuration proposal General Surgery (CH4)

Side view right

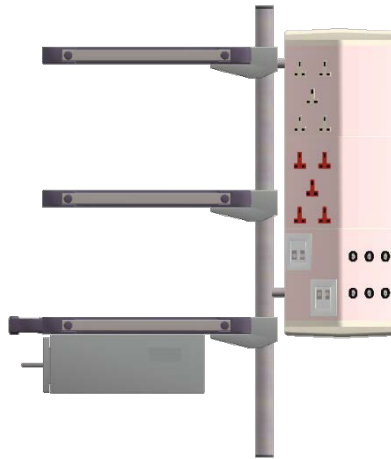

Front view

- | | |
|---------------|---------------|
| O2 1 | 1 White |
| AIR8 2 | 2 White |
| AIR4 3 | 3 White |
| VAC 4 | |
| AIR4 1 | 1 Red |
| VAC 2 | 2 Red |
| AIR4 3 | 3 Red |
| VAC 4 | |
| Preparation 1 | 1 2x Cat6 IDC |
| Preparation 2 | 2 2x Cat6 IDC |



Side view left



Back



1 Preparation