



Configuration proposal Anesthesia Basic ANST


Side view right




Front view



Side view left



Back

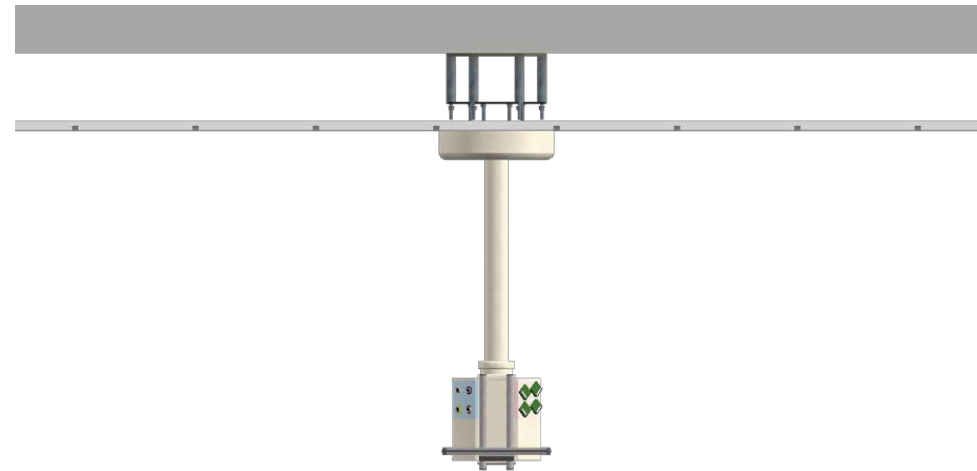

Configuration description:

MediBoom®Air 400 with Service Head 400
1 x Shelf 520 mm

Brake system: friktion


1. Action space*: ---
2. Weights and Pay Loads
 Remaining Net Pay Load: 221 kg
 Max. pendant pay load: 250 kg
 Vertical force as configured: 3317 N
3. Remaining Diameter: 70 %

* reference: centre of main bearing to centre of shelf

Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	1	1	1			1		6	6		
DKD AFNOR (Norme francaise)								Legrand			


Configuration proposal Anesthesia Basic ANST

Side view right




Front view

O2 1		1 Green
N2O 2		2 Green
VAC 3		3 Green
AIR4 4		4 Green



Side view left



Back

Green 1
Green 2

AGFS.E

