



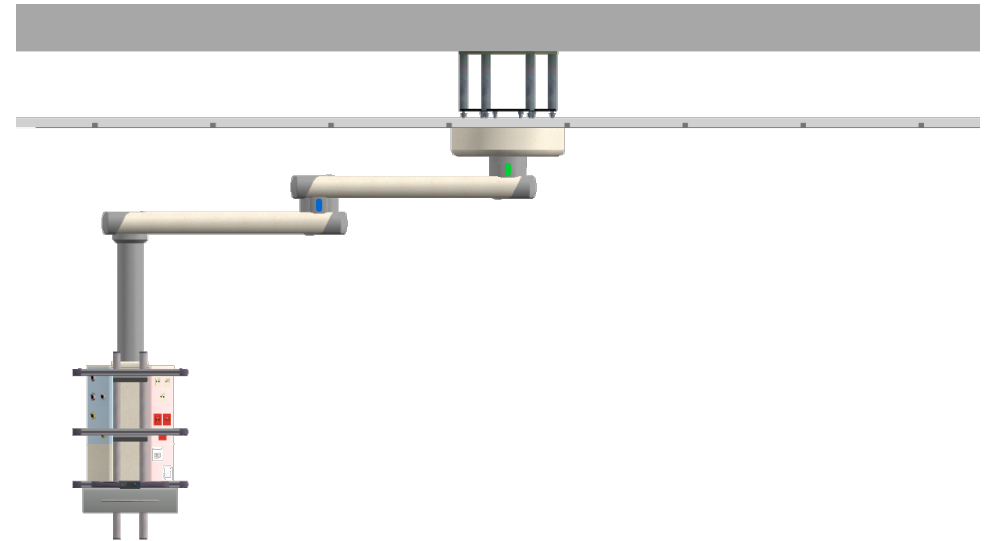

Configuration proposal General Surgery (CH3)

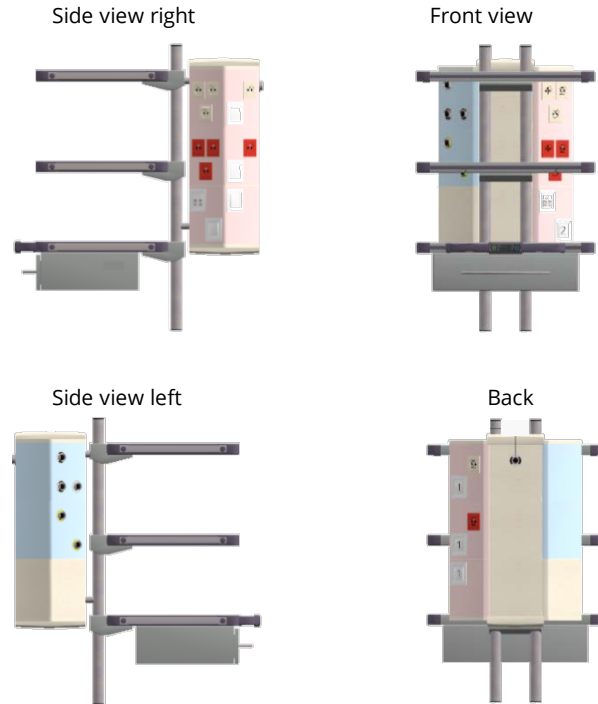

Configuration description:
 MediBoom® 1000/1000 with Service
 Head 600 3 x Shelf 520 mm, 1 x Drawer

1. Brake system: Electromagnetic
2. Action space*: >4,800 mm
3. Weights and Pay Loads
 Remaining Net Pay Load: 110 kg
 Max. pendant pay load: 170 kg
 Vertical force as configured: 2986 N
4. Remaining Diameter: 68 %

Number of service components											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- moto	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	2		2				1	8	8	1	2
DKD AFNOR (Norme francaise)								Legrand			

* reference: centre of main bearing to centre of shelf



Configuration proposal General Surgery (CH3)

Side view right




Front view

- O2 1
- AIR5 2
- AIR5 3
- VAC 1
- VAC 2



- 1 White
- 2 White
- 3 White
- 1 Red
- 2 Red
- 3 Red
- 1 2x Cat6 IDC
- 2 Preparation

Side view left

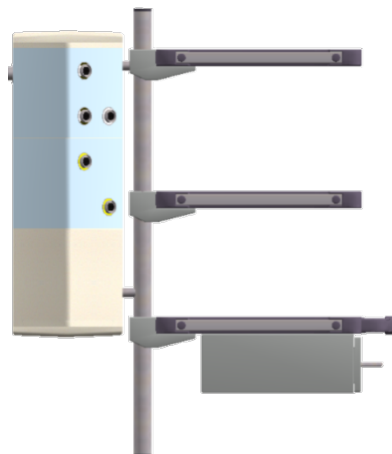

Back



- White 1
- Preparation 2
- Red 1
- Preparation 2
- Preparation 1